





FREEDOM OF CHOICE

It's a must to have freedom of choice when it comes to choose anything for our dream home. You can choose any RAL color even different types of flooring, types of doors, PIT non-PiT, anything you want from our listed optional section.



SPEED CONFIGURATION

Speed- Orka 300 operates with 0.3 m/s speed and its regulated by the machine directive EN 81-41. 0.3 speed ensure not only smooth ride but declared as safe for homes under EU certification.



NICHE & COMFORT

Niche and comfort – Thanks to the European technology made this lift comfort to use at home and niche in product character. Our orka 300 is a match for any home with any needed sizes from 1x1 m upto 1.45x1.45m.



EUROPEAN SAFETY STANDARD

EU safety standard – Orka 300 comply with EN 81-41 safety egulation, and all the safety sensors are handpicked by our engineers to ensure your safety at home.



IN BUILD SHAFT

In build shaft – Orka 300 have the inbuild shaft which save money and time both at the same time. Thanks to its structural design made it possible to install within 2–3 days and no civil construction needed when you have the hole through ready for our lift.

SWING OR DOUBLE DOOR

Swing and double door – we have two types of doors for orka 300. Swing door allows you to wide open and double door allows to access easily for a handicap person. Swing doors can be equipped with automatic door opener while its standard for the

LUXURIOUS DOOR BUTTONS

Simple and elegant design - Orka 300 is simple and one of its kind in the market. Its easily blend into any kind of interior of the home.









2 YEARS WARRANTY

All parts of orka 300 is covered by 2 years standard warranty. Our lift as well as the installation methods meets all relevant standards and certifications.




CUSTOMIZABLE COLOR CARD

12-COAT SPRAYING PROCESS OF AUTOMOBILE METALLIC PAINT

The automobilt metal coating process is adopted and the surface is treated through 12 processing producers, the paint surface is glossy and beautiful, and the touch is delicate and soft.





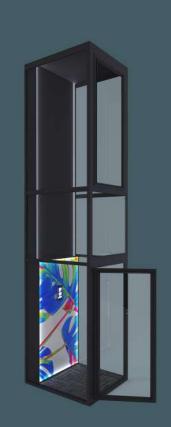




REGULAR COLOURS

OPTIONAL COLOURS

MICROPOWDER COLOURS








SPECIFICATIONS

Please find all necessary specification of orka 300 as below. Starts from the size of the cabin, platform, load capacity and many more.

DOOR IN FRONT OF MACHINE

DOOR BESIDE OF MACHINE

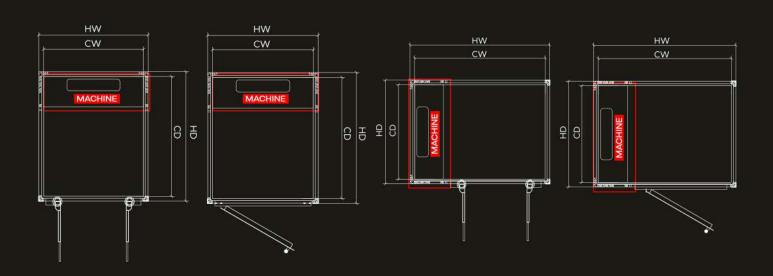

		SHAFT WIDTH	SHAFT DEPTH	CAR WIDTH	CAR DEPTH	DOOR OPENING WIDTH	LOAD	SPEED
DOOR IN FRONT OF MACHINE	Min	1000	1000	860	745	630	260	0,30 m/sec
	Max	1430	1430	1370	1010	840	400	
	Min	900	1100	860	745	580	260	
	Max	1430	1430	1370	1010	840	400	
DOOR BESIDE OF MACHINE	Min	1260	900	905	810	600	260	
	Max	1430	1430	1010	1370	790	400	
	Min	1190	900	905	810	580	260	
	Max	1430	1430	1010	1370	840	400	



Jakarta

Ruko Graha Boulevard, Jl. Raya Boulevard, RW.1, Klp. Gading Tim, Kec. Klp. Gading, DKI Jakarta 14240

Surabaya

Jl. Bangka No.8-A, Gubeng, Kec. Gubeng, Kota SBY, Jawa Timur 60271

Medan


Jl. Puri No.102 A Kota Matsum IV, Medan, Sumatera Utara 20211

Makassar

Jl. Monginsidi No. 32d, RT.3, Maricaya Baru, Kec. Makassar, Sulawesi Selatan 90142

Bali

Pertokoan Soka, Jl. Bypass Ngurah Rai No.18, Tuban, Kec. Kuta, Kabupaten Badung, Bali 80361





@orkandaliftindonesia



@orkanda.id



Orkanda Lift Indonesia



www.orkanda.co.id



(021) 22454705