

# Open platform lift

S - 150 is Open Platform Lift, also known as Wheelchair Lift, which provides internal or external vertical travel up to 3 meters.

Our Open Platform Lift can accommodate changes in level from 600 mm up to 3000 mm in commercial and domestic environments and is appropriate alternative solution to a fully enclosed platform lift.

S - 150 is specifically designed for applications with little or no alterations to existing buildings.

The open type design offers an aesthetically pleasing solution with brushed stainless steel finish as option. The lift provides a safe and easy way to gain access to a property where stairs would otherwise prevent wheelchair access.

It is designed to give customers choice and flexibility.

S - 150 Open Lift is a space saving and cost effective way to provide access for everyone to your home or workplace.




All our lifts are supplied with a 24-months warranty as standard, and we offer a range of maintenance and service options, which can be tailored to suit your specific requirements.

### **Features**

- · Modern lightweight design
- Stainless stell construction as option
- · Low space requirements
- High level of security
- Silent operation
- · Simple to use

- No pit required
- Simple to install and easy to service
- overall low maintenance and running costs

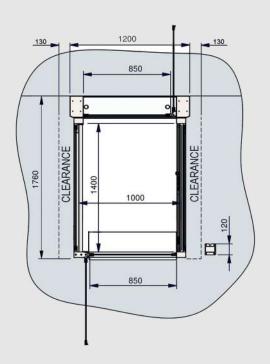

# **Specifications**

1 Company of the Comp	Acceptance
User group	Ambulant and wheelchair users
Suitability	For internal or external use
Travel	Up to 4 metres
Number of stops	2
Maximum capacity	400 kg
Platform size	1100 x 1400 mm (standard)
External dimensions	1300 x 1770 mm (standard)
Gate	950 x 1100 mm (standard) with auto closers
Cabin height	1100 mm
Drive type	Belt
Power	220-240 V, 1 phase, 16A 380-400 V, 3 phase, 10A, 50 Hz
Lighting	Controls illuminated
Safety edge	Safety edge-under platform prox- imity sensors
Handrail	Integrated to lift cabin (on both sides)
Machine room	Integral to guide rails
Floor	Anti slip rubber (Anti slip diamond plate for outdoor version)
Finish	RAL 9006 (White aluminium)

### **Options**

### PLATFORM

900 x 1400 mm 1000 x 1400 mm

#### GATE

Automatic upper gate Automatic lower gate

#### CONTROL

Configurable control side Dual control on the platform Auto dialer on the platform Remote control Braille on the control


#### SAFETY


Battery emergency lowering device

#### **FINISH**

Painted in any RAL color Brushed Stainlees Steel

## S - 150 products overview

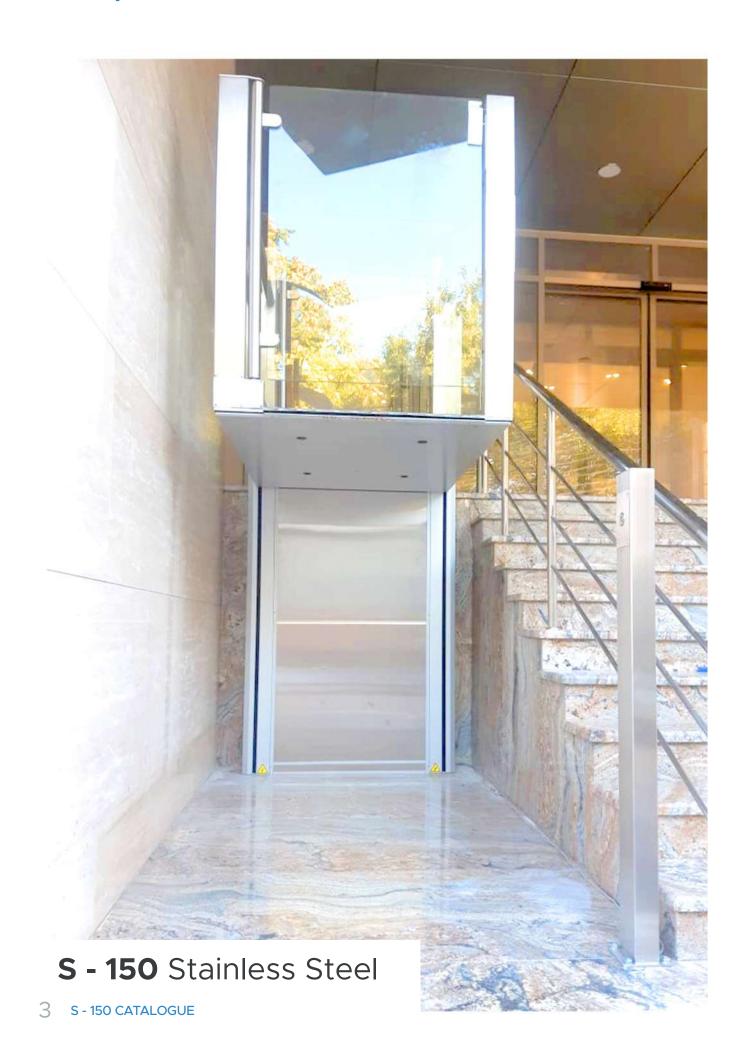

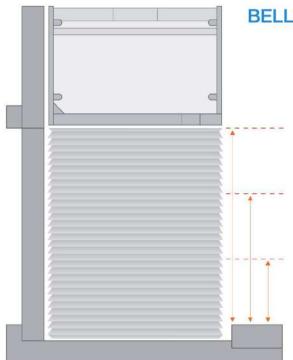

### **BELLOWS UNDER THE PLATFORM**

#### 3 lifting heights:

from 2010 to 3000 mm, pit = 350 mm,

from 1010 to 2000 mm, pit = 260 mm,

from 600 to 1000 mm, pit = 170 mm,

Fixations: on ground floor, at the four corners of the below, and at the platform, fixations will be provide. Platform size possible: 1100 x 1400 mm (shaft 1300 x 1760 mm). Gate openning = 950 mm.





### S - 150 Platform Lift







# **Jakarta**

JL. H.R. RASUNA SAID KAV. C-22, LT. 2 RUANG 210 RT. 002 RW. 005, KARET KUNINGAN, SETIABUDI, KOTA ADM. JAKARTA SELATAN, DKI JAKARTA